
## Bridge manual




Here you can adjust the height of the strings

The saddle itself may be replaced with an RMC Piezo saddle at any time.

This screw stabilizes the saddle ... ( slight tightening the screw pushes a small metal ball against the wall of the slot ). To move the saddle (top, bottom, front or back), you must first loosen this screw.

## This is a piezo wire slot ...

o If your bridge does not have the piezo pickups, you can install them it in the future.

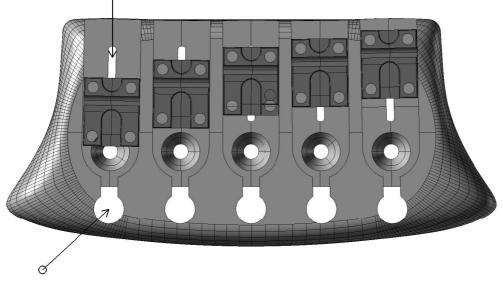

Over here you hook up the string. When putting on a new string, always make sure not to twist it around its axis.